
Greenmood

INSTALLATION MANUAL

CORK TILES

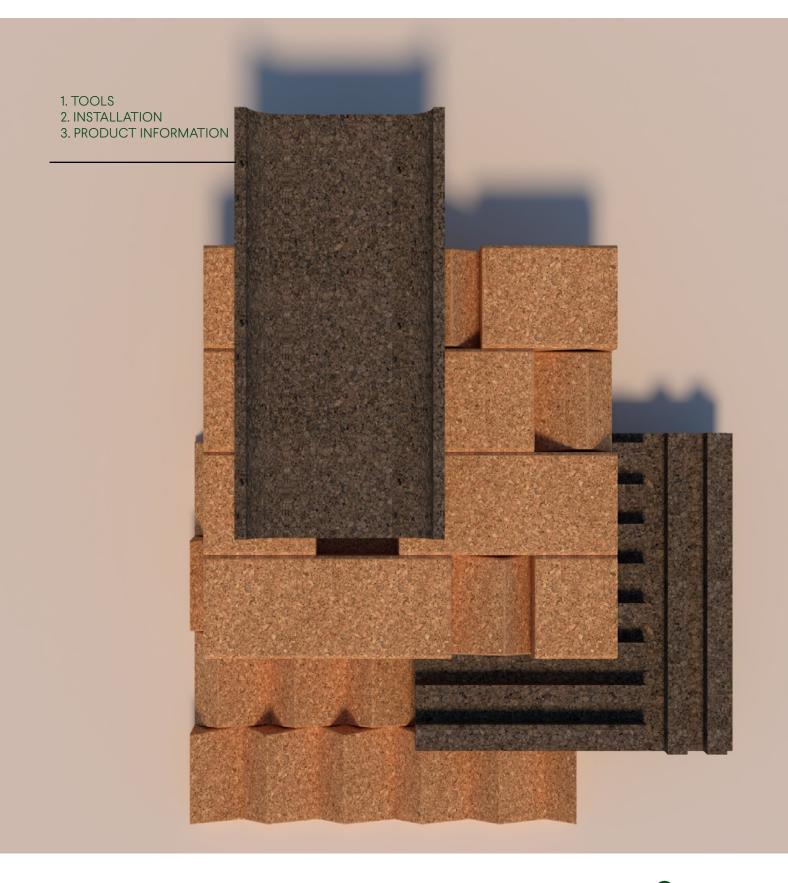

www.greenmood.be • 2023

Greenmood

1. TOOLS










Pencil


Leveling tool

Measuring tape


2. INSTALLATION




(1) Surface preparation: Remove any imprefections



2 Draw guidelines: Use a liquid or a lazer leveler




3 Apply glue: Aim for an even distribution on the back of the cork panel




4 Fix on the wall: Place the panel on the surface following the guidelines

FOR BRICKX & MORSE installation of the Prism



1 Apply glue: Aim for an even distriution on the largest surface of the Prism



2 Place it: Carefully place the Prism in the panel's cavity

Greenmood

3. PRODUCT INFORMATION

PREPARATION

After determining the wall surface to cover and the chosen layout of the pannels, the wall must be prepared for the installation: Remove any wall papper or glue residue and make sure the surface is smooth and moisture free.

GLUING

It is highly recomended to use a water based contact cement adhesive to glue cork panels. A contact cement application means that both the back of the cork panels and the wall is coated with adhesive and allowed to dry.

This flash time is very important and is indicated on the glue by the manufacturer. Water based contact cement limits the amount of moisture a cork tile is exposed to. The layer of adhesive should be applied and be left to dry before putting the pannel on the wall. Once the adhesives have dried the tiles are then installed in a systematic manner.

Make sure to read the adhesive instructions carefully to make sure its suitable for your support wall.

MAINTENANCE

Avoid using cleaning products with abrasive ingredients and solvents. Avoid sunlight exposition for long periods by using curtains to prevent discoloration. Use gently a vacuum cleaner or clean soft fabric to get rid of any dust accumulation.

PROPERTIES OF CORK

Due to the nature of the material, the panels may represent some color variations and a size tolerance of one to two milimiters. Keep in mind that our cork pannels are destined for indoor use only.

www.greenmood.be G • 2023