

# Greenmood<sup>®</sup>

Biophilic Design



## Brickx

---

Product Specification Sheet

Connect with Greenmood

---



# Brickx

Acoustic Cork Tile



Greenmood®



Geometric rhythm, natural balance


Brickx is a modular cork panel inspired by the structure of brick walls. Its sculptural relief plays with angles and voids, creating patterns full of depth and character.

Design by: Alain Gilles

Specifications

	Sound absorption	Class E – NRC 0.2 (ISO 11654:1997), certified by accredited labs in Belgium
	Fire classification	Burns without flame or toxic emissions. Withstands –180°C to +120°C (–292°F to 248°F).
	Thermal Insulation	Biocompatible insulator with zero deterioration, resistant to pests, mold & bacteria.
	Conditions of use	Indoor only – 40% to 80% RH recommended, avoid direct sunlight, direct water or heat exposure
	Hypoallergenic	Dust-free, allergen-free, safe for asthma sufferers.
	Durable	Stable, compressive-resistant, vapor-permeable. Not affected by rodents or chemical agents.
	Gross weight	1.55kg (3.4 lbs) (Prism 10gr/0.02 lbs)

Acoustic performance

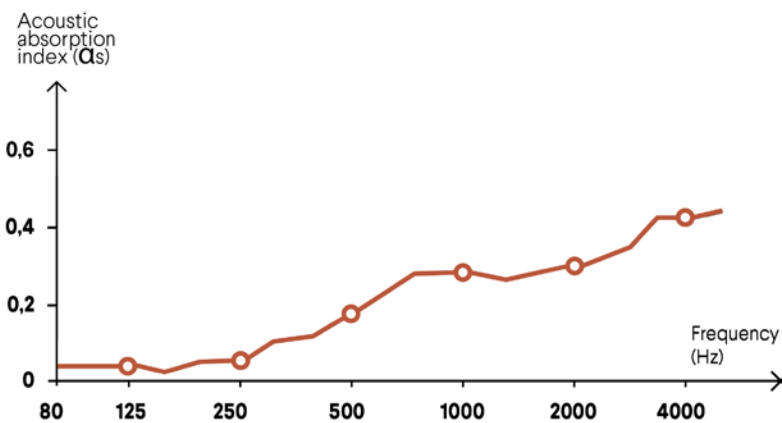

Brickx tiles are tested according to ISO 11654:1997 by a certified lab in the Netherlands.  
Sound absorption class: **E NRC: 0.2**

## Color range

Made from 100% natural cork, with no additives or chemical treatments.


Natural




Natural



## Dimensions

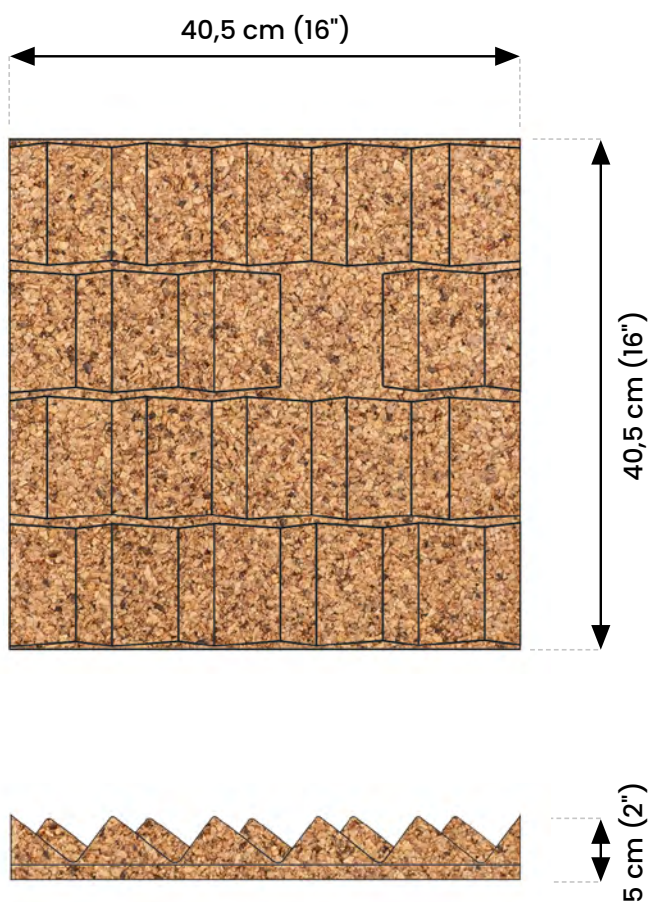

 1.55 kg (3.4 lbs)

## Composition

### 92% cork granules

Granulometry TYPE POWDER + granules 1 - 2 mm.  
Ground, purified and dried cork oak bark

### 8% BioCol Bs 30

Polyurethane polymer, suitable for food contact

### Manufacturing process

Compression molding

### Does not contain

- Pentachloropenol
- Tetrachloropenol
- Formaldehyd
- Cadmium
- Colorants AZO
- Chromo VI

### Disclaimer

As a 100% natural material, each cork tile is absolutely unique. Slight color and thickness differiations may occur. After installation, in some parts, points of junction might be visible.