

# Greenmood<sup>®</sup>

Biophilic Design



## Tail

---

Product Specification Sheet

Connect with Greenmood


---



# Tail

---

Visual & acoustic double-sided  
suspensions

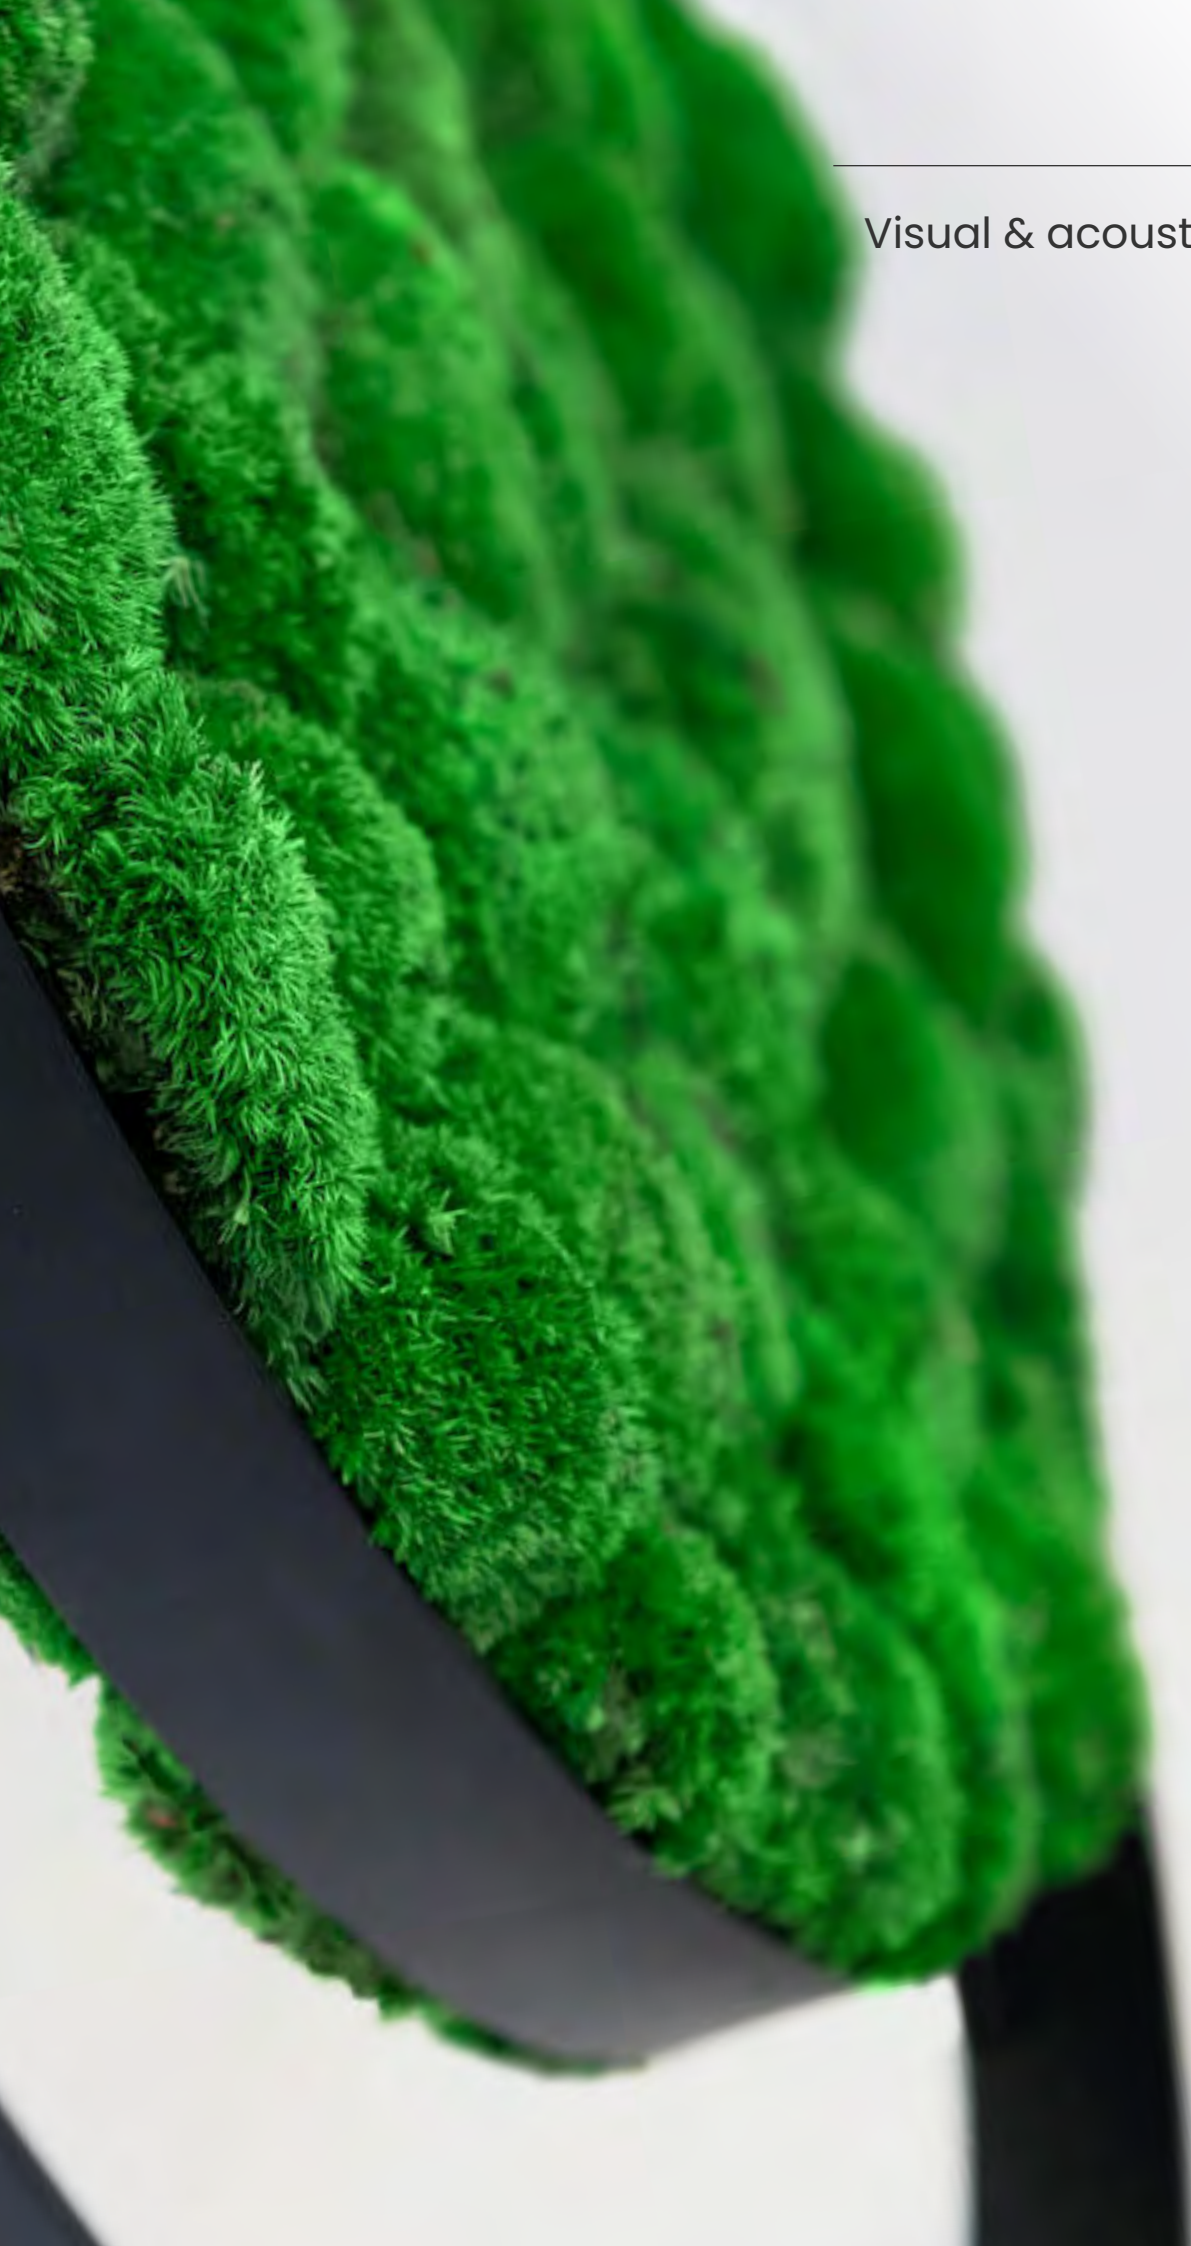

Visual & acoustic double-sided suspensions


Tail is a suspended acoustic feature that combines a moss-filled circle inside a hollow ring, extended by a sleek metal line. This sculptural element plays with balance and orientation, turning empty spaces into striking biophilic highlights.

Design by: Alain Gilles

Specifications

Choice of 9 metal frame finishes

Choice of 4 fillings

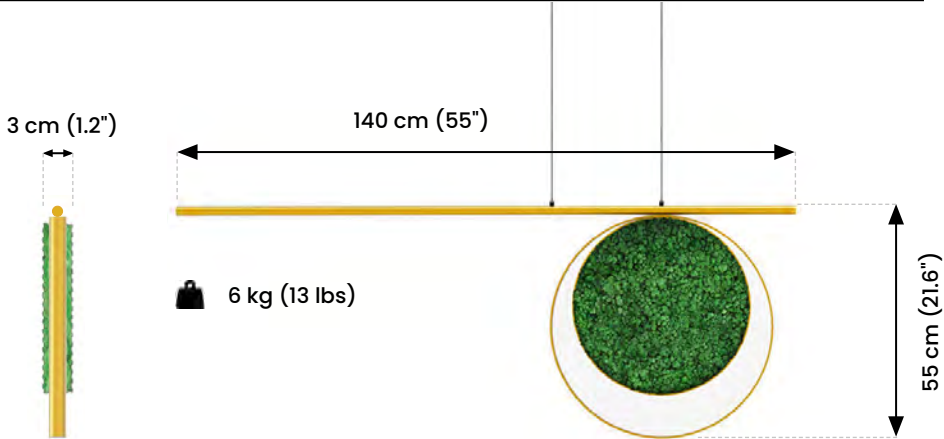

Powder Coatings

Matte Black

Texture	Gloss Level	RAL
Fine texture	20+5	9005

Matte Grey

Texture	Gloss Level	RAL
Fine grainy	MAT/FS	7032

Matte White

Texture	Gloss Level	RAL
Fine grainy	20+5	9000

Corten

Texture	Gloss Level
Coarse	81+5

Sparkling Burgundy

Texture	Gloss Level
Fine grainy	MAT/MFS

Gold

Texture	Gloss Level
Smooth Grainy	80+5

Matte Blue

Texture	Gloss Level	RAL
Fine grainy	MAT/FS	5014

Sparkling Green

Texture	Gloss Level	RAL
Fine grainy	ME/METF	9010

Sparkling Red

Texture	Gloss Level	RAL
Coarse texture	81+5	3602

FILLINGS




Origin	Scandinavia
Durability	No watering required, no sunlight, no pruning or trimming
Health	Non-toxic / Non-allergen
Lifespan	+/- 10 years
Safety	B-s2-d0 • FSI0/SDI15 • Fire rated
Sound absorption	Class D – NRC 0.35 (ISO 11654:1997)



Origin	Europe
Durability	No watering required, no sunlight, no pruning or trimming
Health	Non-toxic / Non-allergen
Lifespan	7 - 10 years
Safety	B-sl-d0 • FSI 0 / SDI 10
Sound absorption	Class D – NRC 0.73 (ISO 11654:1997)



Origin	Europe
Durability	No watering required, no sunlight, no pruning or trimming
Health	Non-toxic / Non-allergen
Lifespan	5 - 7 years
Conditions of use	Indoor use only, Recommended humidity: 40% to 80%
Sound absorption	May vary depending on density and layout

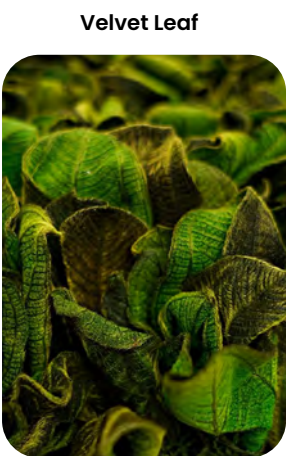

Origin	South Africa
Durability	No watering required, no sunlight, no pruning or trimming
Health	Non-toxic / Non-allergen
Lifespan	5 - 7 years
Conditions of use	Indoor use only, Recommended humidity: 30% to 80%
Sound absorption	Class C – NRC 0.65 (ISO 11654:1997)

